

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 5 TOWNSHIP 15 RANGE 5

DATE: ~~7-19-02~~ ~~8-06-07~~ 11/20/07

PARTY CHIEF: ~~Kiste~~ Wilcoxen

CREW: _____

TYPE OF MARKER: Harrison Fd.


METHOD OF ESTABLISHMENT: County: 8-3-97

IN. S.P.C. E ZONE NAD '83

NAME: 15050501

N: 503372.9710(m)

E: 70643.7080(m)

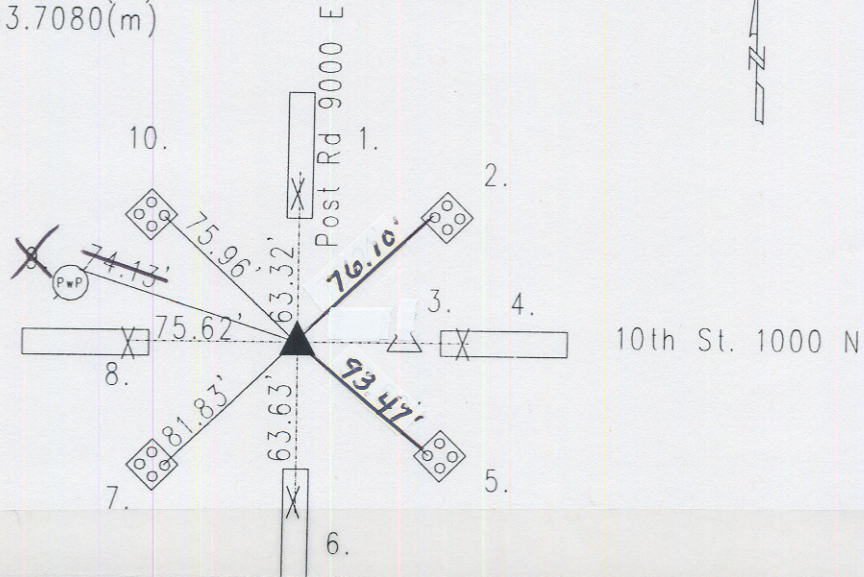

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 8" mulberry bearing south 69 degrees, thence east 19 links; and a 7" beech bearing north 83 degrees, thence west 16 links. (M.C. Atlas p. 14) A survey by O.W. Voorhies on April 10, 1864 indicates no stone but the following witnesses: 18" red oak bearing north 14 degrees, thence east 58 links, and a 36" elm bearing south 64 degrees, thence east 33 links. (Warren Legal Book p. 49) Corner referenced by Baden on 8/4/55 and called a brass plug in cast iron box. Corner referenced by Burres on 4/24/57 and called a brass plug in cast iron box. Corner referenced by Monroe on 3/10/58 and called a brass plug in iron box. Corner referenced by Burres on 8/19/64 and called a brass plug in cast iron box. Corner referenced by McIand on 1/31/69 and called a brass plug in iron box. Corner referenced by Sefranka on 5/19/72 and called a brass plug in iron box. Corner referenced by Gries on 12/19/86 and called a p.k. Nail. Corner referenced by Wilcoxen on 6/12/90 and called a p.k. Nail. Corner referenced by Wilcoxen on 7/31/96 and called a mag nail with washer. Corner referenced by Wilcoxen on 8/3/97 and called a p.k. Nail. Corner excavated by Whiteside on 7/18/02 and a mag nail was found 12" down. A p.k. Nail was found 13" down. A 2"x2" wood stake was found 20" down. All points were in same location as ties. A # 205 cast iron Harrison monument was set in position as the corner.

REF.	DISTANCE	DESCRIPTION
1.	63.32'	Due N to Cut 'x' S-end of median
2.	76.10'	Cut 'x' Westerly bolt of signal pole base
3.	61.80'	Due E to SWcor 32-16-5 Harrison
4.	89.65'	Due E to cut 'x' in W-end of median
5.	93.47'	Cut 'x' westerly bolt of signal pole base
6.	63.63'	Due S to cut 'x' in N-end of median
7.	81.83'	Cut 'x' easterly bolt of signal pole base
8.	75.62'	Due W to cut 'x' in E-end of median
9.	74.13'	PK nail NE PwP#100-521 12" up
10.	75.96'	Cut 'x' easterly bolt of signal pole base